



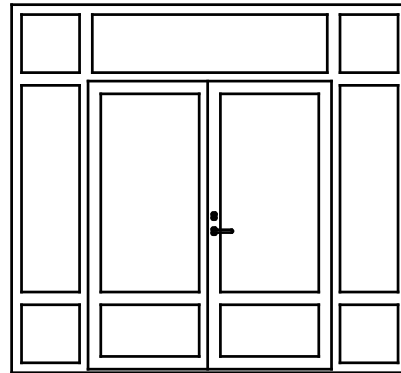



Rauduks OÜ	koostas:	A. Murde	tähis:	P07J07
Steel profile fire door RU2 EI30/EI60	kinnitas:	A. Orumaa	lehti:	1
	kehtib alates:	01.06.2015	leht:	1



glass panel

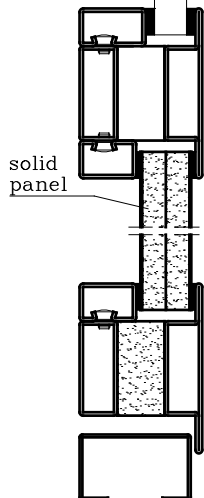



solid panel



65

threshold type 1

threshold type 2

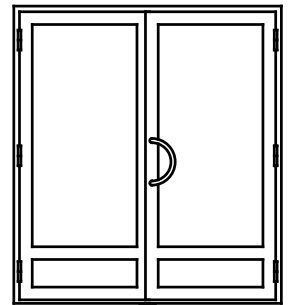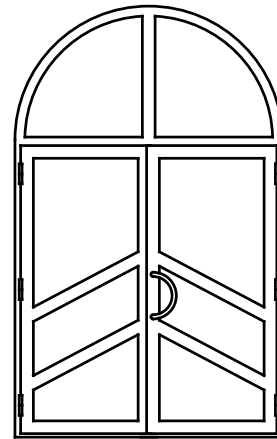

Applications:	
Fire doors and windows	
Features:	
Max. width of the frame	3000 mm
Max. height of the frame	2200 mm
Thickness	1,8 mm
Steel profile	Stålprofil (Sweden)
	- cold rolled
	- galvanized
	- stainless
Fire resistance	EI30 / EI60
U-value	-
Sound insulation	up to 46 dB
Burglar resistance	-
Threshold	1,5 mm stainless
Finish	Powder Coating
Air Vent	yes
Glass Panel	yes
Max. thickness of the glass	35 mm
Lock types	all common types

